

ACI105 module specification

ACI105-A08(-03)

Important Notice:

AVANTCOM reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice. AVANTCOM integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in lifesupport applications, devices or systems or other critical applications. Use of AVANTCOM products in such applications is understood to be fully at the risk of the customer.

General Description

The ACI105-A08 module is designed for 2.4GHz ISM band wireless applications using AVANTCOM ACI105 FSK/GFSK transceiver. This module features a fully programmable frequency synthesizer by SPI. The maximum data rate is 500Kbps.

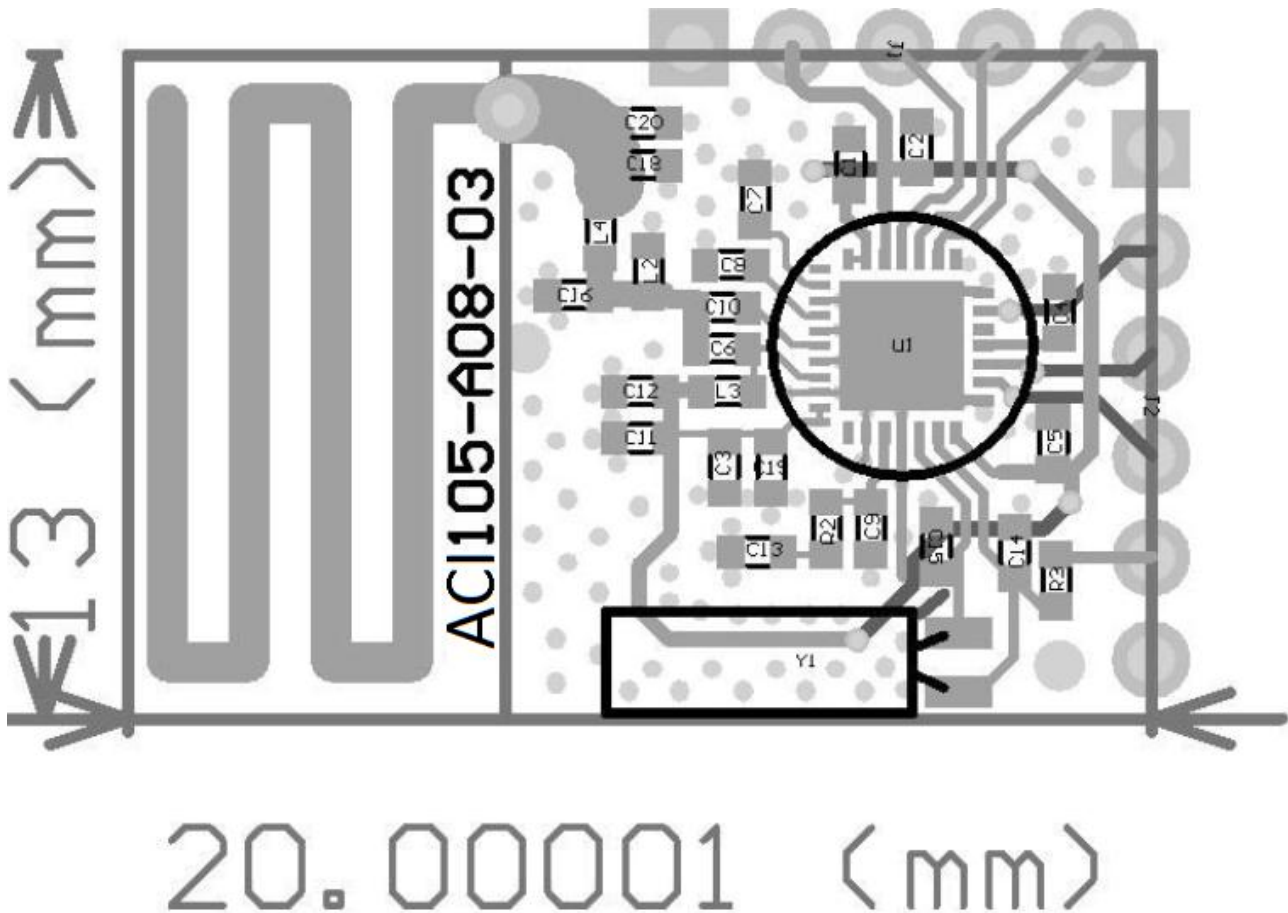
This module is designed for COB (Chip on PC Board).

Electrical Specification

Item	Specification	Remark
Supply voltage	2.0V~3.6V	
Current consumption	0.7uA @Sleep mode 0.3mA @Idle mode 1.7mA @Stand-by mode 15.5mA @Rx mode 20.5mA @Tx mode (Pout = 0dBm)	typical
Frequency	2400 – 2483 MHz	ISM band
Transmit output power	0 dBm @ room temperature	typical
Rx sensitivity	-110 dBm (typical) @ 2Kbps mode, Dev = 124 KHz -104 dBm (typical) @ 25Kbps mode, Dev = 124 KHz -97 dBm (typical) @ 250Kbps mode, Dev = 186 KHz -93 dBm (typical) @ 500Kbps mode, Dev = 186 KHz	BER ≤ 1E-3
Modulation	FSK or GFSK	
Transmission distance	18 meter	BER ≤ 1E-3
Interface	5 pin 2mm header, 6 pin 2mm header	
Dimension	20mm(L) x 13mm(W) x 2mm(H)	
Operating temperature	-40 ~ 85 °C	

Interface

Pin No.	Symbol	Function Description	Remark
1	GND	Ground	J1 Pin1
2	VIN	RF Module Supply Voltage Input	1.9V ~ 3.6V, J1 Pin2
3	CKO	Clock Output	J1 Pin3
4	GIO2	General Purpose I/O 2	J1 Pin4
5	GIO1	General Purpose I/O 1	J1 Pin5
6	GND	Ground	J2 Pin1
7	SDIO	SPI Data I/O	J2 Pin2
8	SCK	SPI Clock	J2 Pin3
9	SCS	SPI Chip Selection	J2 Pin4
10	X_CLK	X'tal Clock Output	J2 Pin5
11	GND	Ground	J2 Pin6
12	GND	Ground	J3 Pin1

Module dimension drawing


1. The back plate of the IC should connect to GND.
2. When using cylinder crystal, please take special care as below:
 - (1) Please don't apply solder to the body directly, as it may cause characteristic deterioration.
 - (2) Please fix the unit firmly with elastic glue on the board.
 - (3) Please don't cut or bend the leads within 0.5 mm from the base of the cylinder body.
 - (4) Please don't use ultrasonic washing and ultrasonic welding on the unit, because it may be damaged.
 - (5) Please ask how to use it to avoid damage for detail from your crystal supplier.

Bill of Material

Item	Component	Description	Size	Value	Tol.	Remark
1	C1	Y5V ceramic capacitor	0402	2.2uF	20%	Annotation 1
2	C2	Y5V ceramic capacitor	0402	2.2uF	20%	Annotation 1
3	C4	Y5V ceramic capacitor	0402	2.2uF	20%	Annotation 1
4	C5	Y5V ceramic capacitor	0402	0.1uF	20%	
5	C6	NPO ceramic capacitor	0402	10pF	5%	Tx matching circuit
6	C7	NPO ceramic capacitor	0402	120pF	10%	
7	C8	X7R ceramic capacitor	0402	1.5nF	10%	
8	C9	X7R ceramic capacitor	0402	680pF	10%	PLL Loop Filter
9	C10	NPO ceramic capacitor	0402	22pF	5%	Rx matching circuit
10	C12	NPO ceramic capacitor	0402	100pF	5%	Tx matching circuit
11	C13	X7R ceramic capacitor	0402	10nF	10%	PLL Loop Filter
12	C14	NPO ceramic capacitor	0402	33pF	5%	Annotation 2
13	C15	NPO ceramic capacitor	0402	33pF	5%	Annotation 2
14	C16	NPO ceramic capacitor	0402	1pF	0.25pF	LPF
15	C18	NPO ceramic capacitor	0402	1pF	0.25pF	LPF
16	C19	NPO ceramic capacitor	0402	10pF	5%	
17	C20	NPO ceramic capacitor	0402	1pF	0.25pF	for antenna matching
18	L2	Chip inductor	0402	1Kohm	5%	
19	L3	Chip inductor	0402	1.2nH	0.1nH	Viking AL02BT1N2
20	L4	Chip inductor	0402	2.7nH	0.1nH	Viking AL02BT3N1
21	R2	Chip resistor	0402	200ohm	5%	PLL Loop Filter
22	U1	TRX	die	A7105		ACANTCOM
23	Y1	Crystal	AT-26	16MHz	20ppm	Yoketan Corp. , Aurum Tech , eCERA , Cload 20 pF
	C3		0402	NC		
	C11		0402	NC		
	R3		0402	NC		

Annotation:

1. If the module is operated in the temperature range: 0~60 degree C, The value of C1, C2, C4 can be changed to 1uF.
2. The value of C14, C15 maybe change to correct the frequency offset.
3. About the spec. of X'tal, please see ACI105_00 v0.4 page 3 for detail.
4. There is no L1.

瑋忠科技股份有限公司 / 台灣

瑋忠科技股份有限公司

Avant-Com.Inc

》 聯絡方式 》 》

地址：11494 臺北市內湖區民權東路六段13-23號3樓
3F.,No.13-23,Sec.6,Minquan E. Rd., Neihu
Dist., Teipei City 114 ,Taiwan

聯絡電話：02-8792-5853(Rep) / 傳真號碼：02-8792-5796

E-mail：service@avantcom.com.tw

奇翰電子有限公司 · 香港奇翰科技有限公司 / 深圳市

深圳奇翰電子有限公司 Avant-Com (Shenzhen) , Ltd.

香港奇翰科技有限公司 Avant-Com , Ltd.

Tel: +86-755-82793556

Fax: +86-755-82793553

地址:中國廣東省深圳市南山區南頭街98號南頭大廈9A(南頭街道辦事處樓上)